



Residential Wood Heating Test Report Review and PM Method Precision Testing

National Residential Wood Smoke Training Workshop

April 12, 2023

Steffan Johnson – Group Leader – EPA MTG

Recognition of IDC Measurement Methods

- All protocols and PM measurement methods used in this study were developed by Northeast States for Coordinated Air Use Management (NESCAUM) and are property of the New York State Energy Research and Development Authority (NYSERDA) and are credited here. Written permission was obtained for use specifically for this research.
 - NYSEDA Integrated Duty Cycle Test Method for Certification of Cordwood-Fired Hydronic Heating Appliances: Measurement of Particulate Matter (PM) and Carbon Monoxide (CO) Emissions and Heating Efficiency
 - NYSEDA Integrated Duty Cycle Test Method for Certification of Thermostatically Controlled Automatic-Feed Hydronic Heating Appliances: Measurement of Particulate Matter (PM), Carbon Monoxide (CO) Emissions and Heating Efficiency
 - NYSEDA Integrated Duty Cycle Test Method for Certification of Thermostatically Controlled Central Warm Air Appliances: Measurement of Particulate Matter (PM), Carbon Monoxide (CO) Emissions and Heating Efficiency
 - NYSEDA Integrated Duty Cycle Test Method for Certification of Wood-Fired Stoves Using Cordwood: Measurement of Particulate Matter (PM) and Carbon Monoxide (CO) Emissions and Heating Efficiency
 - NYSEDA Integrated Duty Cycle Test Method for Certification of Automatic-Feed Stoves: Measurement of Particulate Matter (PM) and Carbon Monoxide (CO) Emissions and Heating Efficiency

2020 Round Table Meeting

- 30+ Industry, State and EPA staff met in RTP
 - Discussed Integrated Duty Cycle operation versus existing ASTM “burn rate” operation.
 - EPA announced we would pursue vetting of the IDC compliance approach including the use of TEOMs for measurement of PM
- TEOMs are capable of real-time PM measurement
 - Provides for a better understanding of PM emissions profile
 - More sensitive than filter-based approaches

Test Method Evaluation

- Evaluation of TEOM sampling for PM – Precision study
 - Being conducted at EPA with Office of Research & Development (ORD) partnership
- Evaluation of Wood-Fired Stoves Using Cordwood Integrated Duty Cycle method – Precision study
 - Two separate test labs, each with side-by-side identical appliances
 - Goal is to understand test variability and performance
- Evaluation of similar IDC methods at two test labs for:
 - Pellet heaters
 - Hydronic heaters (pellet and cordwood)
 - Forced air furnaces

Accuracy / Bias / Precision

- **Accuracy:** The closeness of agreement between a test result and an accepted reference value ("truth").
- **Bias:** The difference between the expectation of the test results and an accepted reference value.
- **Precision:** The closeness of agreement between independent test results obtained under stipulated conditions.


*ASTM International. (2020). ASTM E177-20, Standard Practice for the use of the terms Precision and Bias in ASTM test methods.

Accuracy / Bias / Precision Visual

- Accuracy /Trueness cannot be assessed as there is no reference standard particulate source for wood smoke. Therefore, Bias also cannot be assessed.
- This makes precision very important to characterize, as it is the only information we can reliably collect about the test methodology.



Trueness

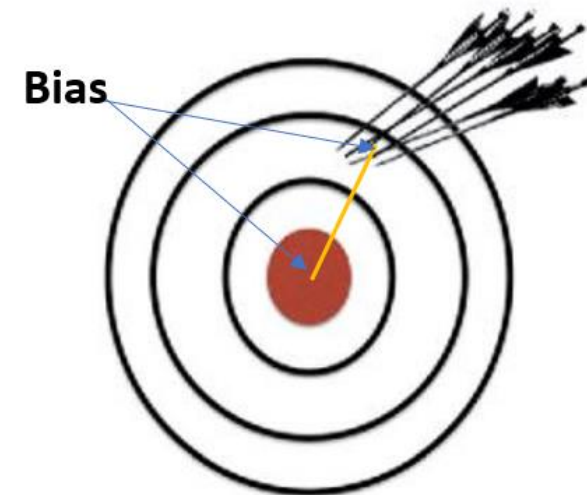

Precision

Repeatability & Reproducibility Definitions

- **Repeatability Conditions:** Conditions where independent test results are obtained with the same method on identical test items in the same laboratory by the same operator using the same equipment within short intervals of time.
- **Reproducibility Conditions:** Conditions where test results are obtained with the same method on identical test items in different laboratories with different operators using different equipment.

*ASTM International. (2020). ASTM E177-20, Standard Practice for the use of the terms Precision and Bias in ASTM test methods.

ORD PM Measurement Precision Testing

- Precision test in one lab setting is known as “Repeatability”
 - What spread of test results might we expect with replicates?
- ORD lab burned hardwood pellets in a pellet heater.
- Paired Dichot TEOMs (two channels per TEOM device)
- 21 test runs for statistical evaluation using ASTM E691
 - Calculate standard deviation for each TEOM
 - Calculate repeatability standard deviation for the pairs

$$s_x = \sqrt{\sum_1^p d^2 / (p - 1)}$$

$$s_r = \sqrt{\sum_1^p s^2 / p}$$

IDC Precision - Repeatability

- IDC Repeatability matrix:
 - Wood heater cordwood method
 - 3 appliance models, pairs of each, replicate tests on 2 different fuels
 - Non-catalytic, hybrid, and catalytic controls.
 - Douglas fir and maple fuel (West), maple and birch fuel (East)
 - Separate TEOM used for testing each of the paired appliances
- 52 IDC test runs – 26 pairs of tests, 13 pairs per fuel

IDC Precision - Reproducibility

- Douglas fir and maple in Western lab
- Maple and birch in Eastern lab
- 3 wood heater appliance types, different sizes and controls
 - 52 IDC tests, 3 different stoves (26 paired tests, 13 for each fuel)
 - Precision /Repeatability based on single lab results
 - Reproducibility based on evaluation of both data sets
- 104 IDC test runs total (both east & west labs)

IDC Precision – Test Breakdown

- Douglas fir, maple and birch fuels used
- Non-catalytic stove: 1 pair, 2 fuels, 3 runs, 2 labs = 24 tests
- Catalytic stove: 1 pair, 2 fuels, 3 runs, 2 labs = 24 tests
- Hybrid stove: 1 pair, 2 fuels, 7 runs, 2 labs = 56 tests
- 52 tests with maple, 26 with Douglas fir, 26 with birch

IDC Ongoing Evaluation

- Hydronic heaters (pellet and cordwood) - current
 - 3 models, 2 tested in pairs, two laboratories
 - 2 cordwood models, 1 pellet fired model
- Pellet heaters
 - Two models, tested in pairs, two laboratories

IDC Planned Future Evaluation


- Forced air furnaces
 - Two models, tested in pairs, two laboratories
- Pellet heaters
 - Two models, tested in pairs, two laboratories
- Ruggedness testing for each IDC protocol

What is the point of these studies?


- New test methods mean a new definition of PM measurement
- This requires new PM standards setting /rulemaking
- New emissions limits for each appliance type
- New test method then used for compliance at any lab
 - Must know emissions limit is reasonable and that method precision supports compliance measurement at different labs.
 - Precision test data underpins method understanding and regulatory use.

Current Timeline

IDC Methods Testing Timeline

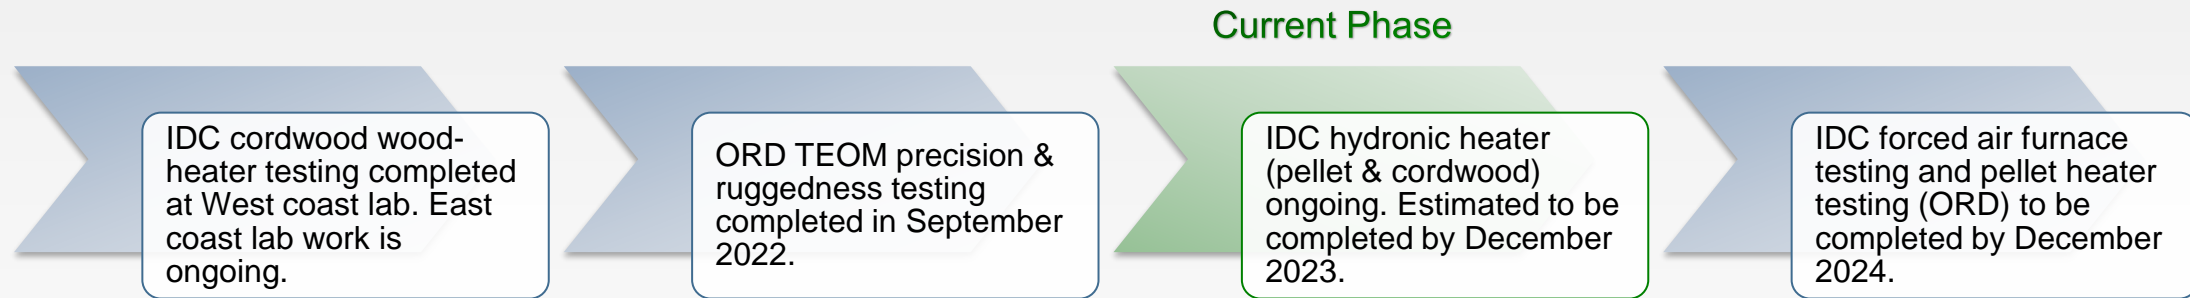

Rulemaking Timeline

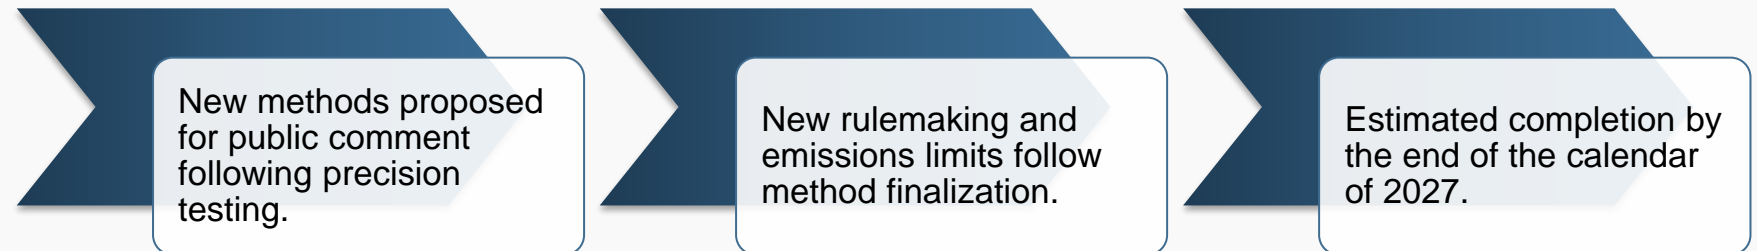

All Evaluation Information in EPA's Docket

- Raw data, SOPs, QAPPs, IDC Protocols, IDC fuel calculators, final data and reports will be made available in EPA's docket for public access.
 - Link
 - <https://www.regulations.gov/docket/EPA-HQ-OAR-2016-0130>

Questions?

**Thank you very much
for your time today!**

Contact Us:

Steffan Johnson

✉ Johnson.steffan@epa.gov

Angelina Brashear

✉ Brashear.angelina@epa.gov