



Central Location Clearances

NO Heat Shields

NO combustibles within 10 inches of the top of the fireplace.

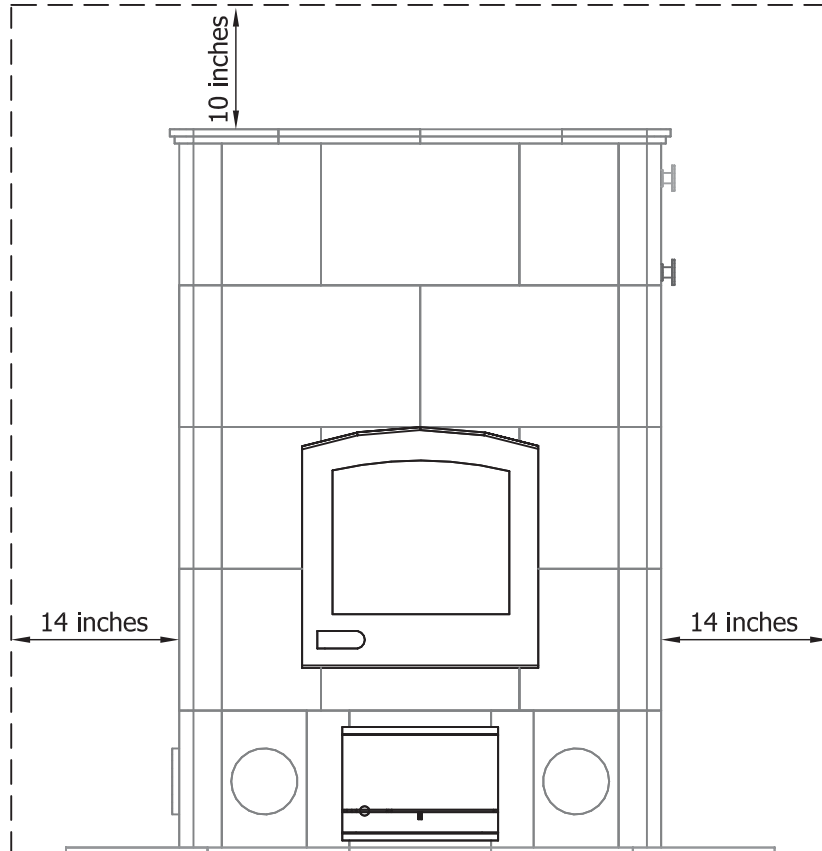

UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

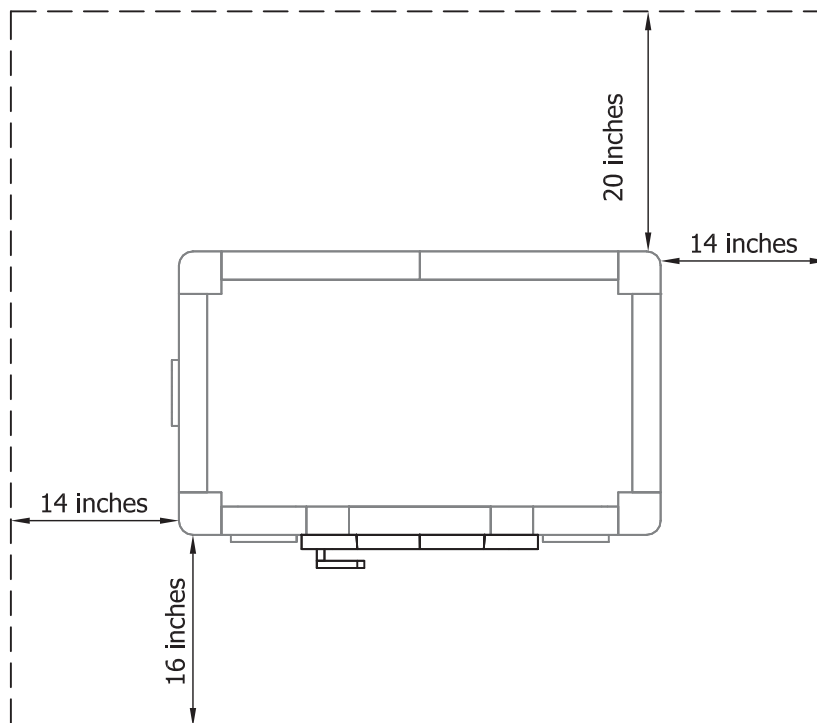


NO combustibles within 20 inches of the back of the fireplace. Tulikivi's UL approved heat shield reduces clearance to 3 inches from combustible.


UL Listing requires NO combustibles within 14 inches of the sides of the fireplace

Tulikivi's UL Listing requires minimum non-combustible hearth extension of 16 inches in front of the firebox door and 8 inches beyond either side of the fireplace.

Combustible Wall Clearances With Heat Shield

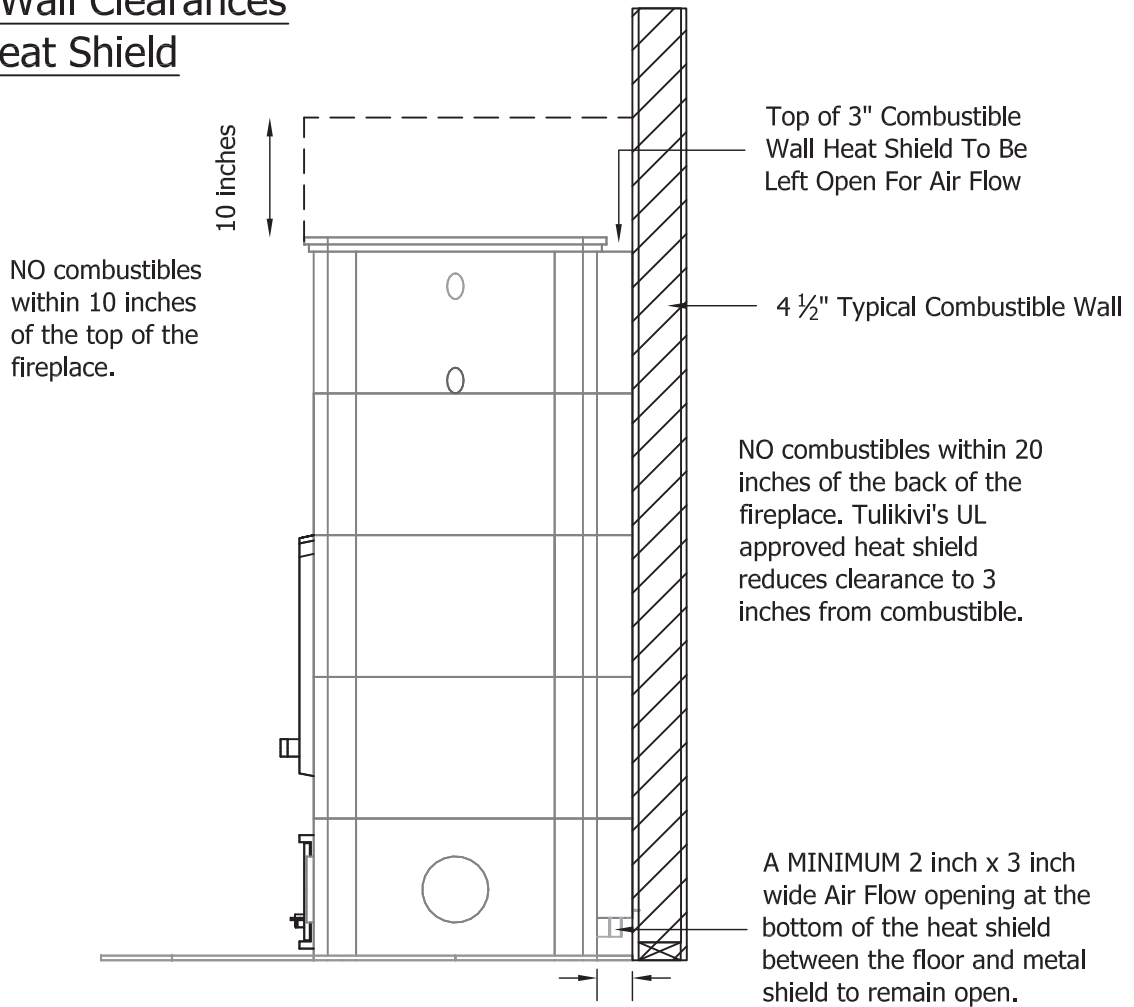

Metal combustible wall heat shield.
sides of heat shield covered with
soapstone tile.


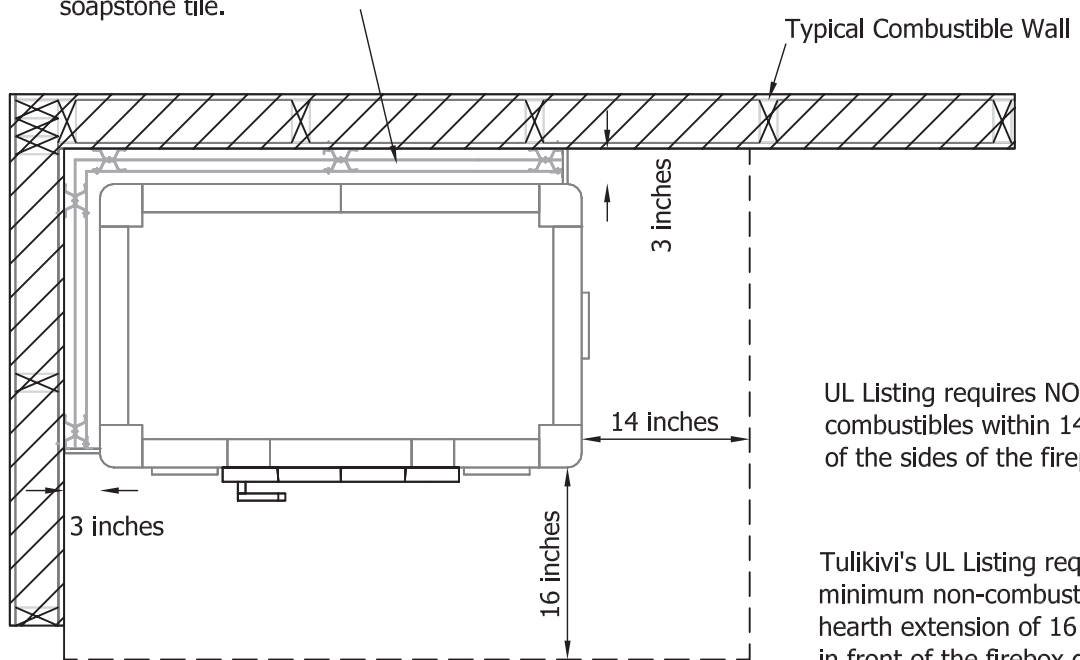


UL Listing requires NO combustibles within 14 inches of the sides of the fireplace


Tulikivi's UL Listing requires minimum non-combustible hearth extension of 16 inches in front of the firebox door and 8 inches beyond either side of the fireplace.

Combustible Wall Clearances

NO Heat Shield

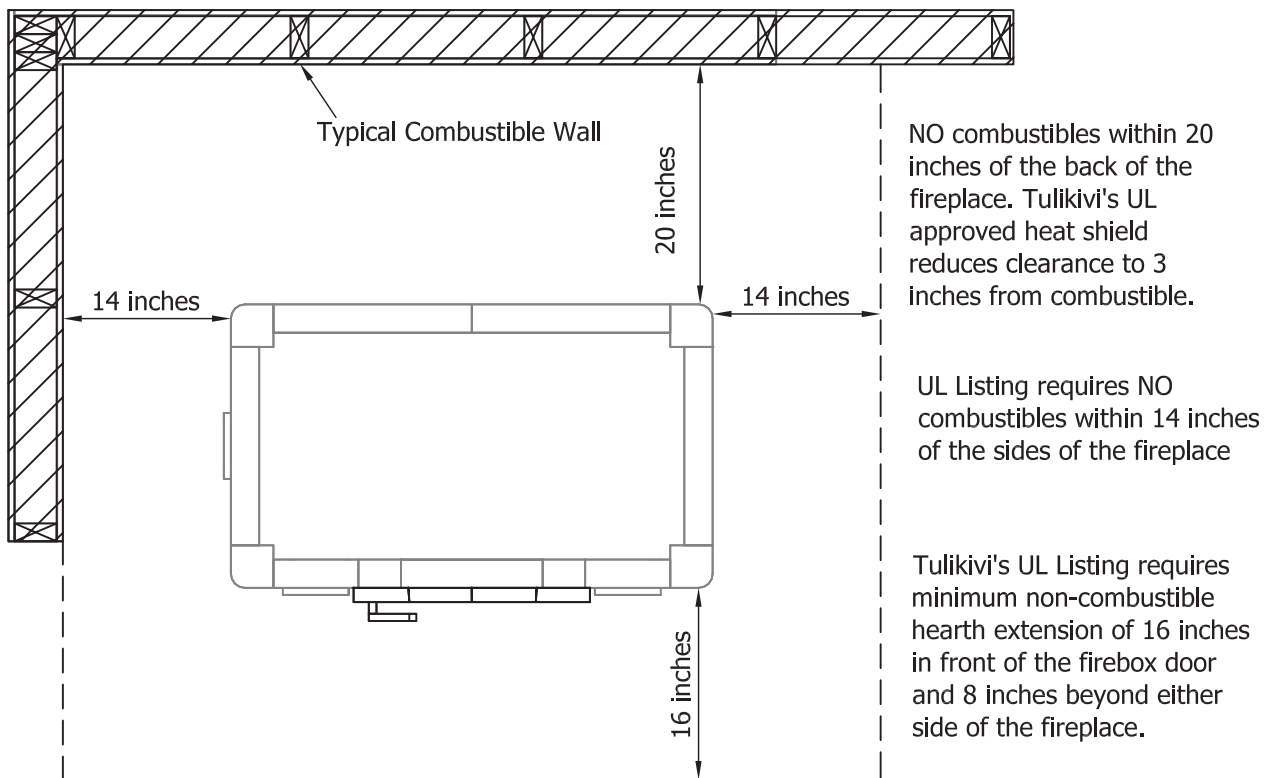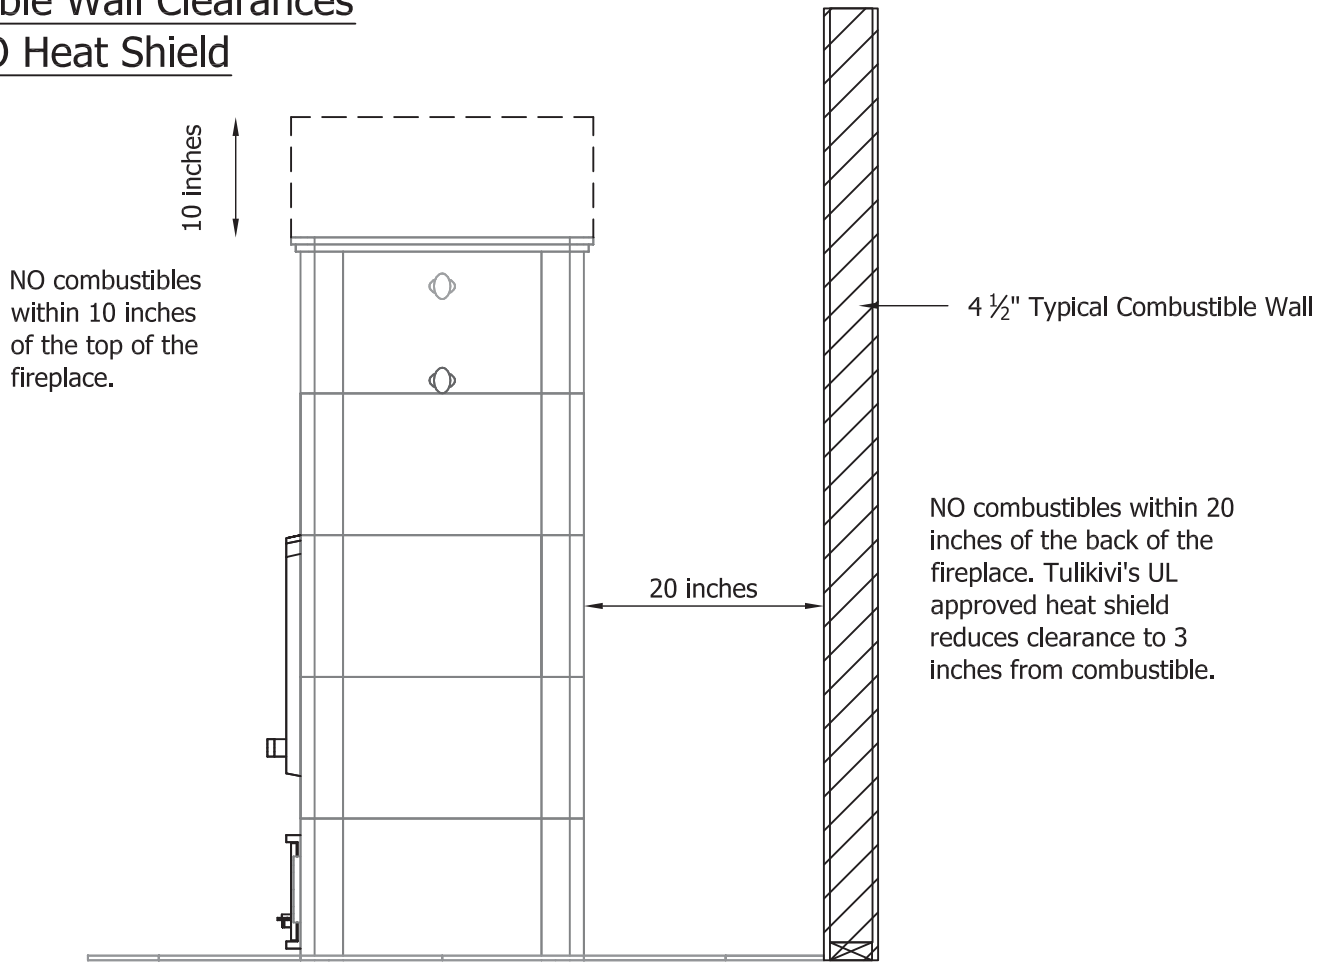


Non-Combustible Wall Clearances With Heat Shield

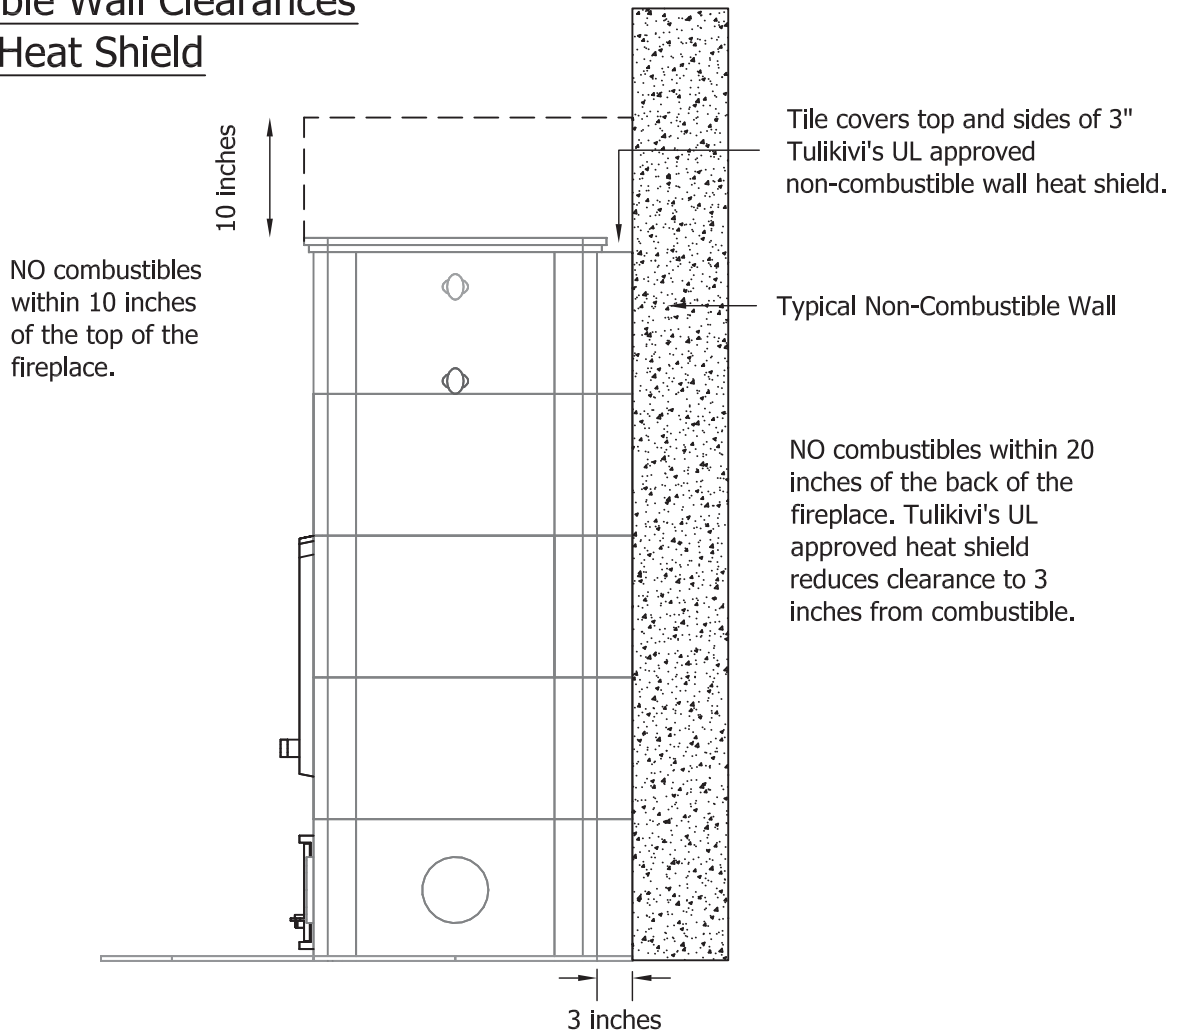

Foamglas non-combustible wall heat shield.
Top and sides of heat shield covered with soapstone tile.

If a foamglas heat shield is not present between the fireplace and the non-combustible wall you must maintain 14" from sides and 20" from the back of the fireplace to combustibles.

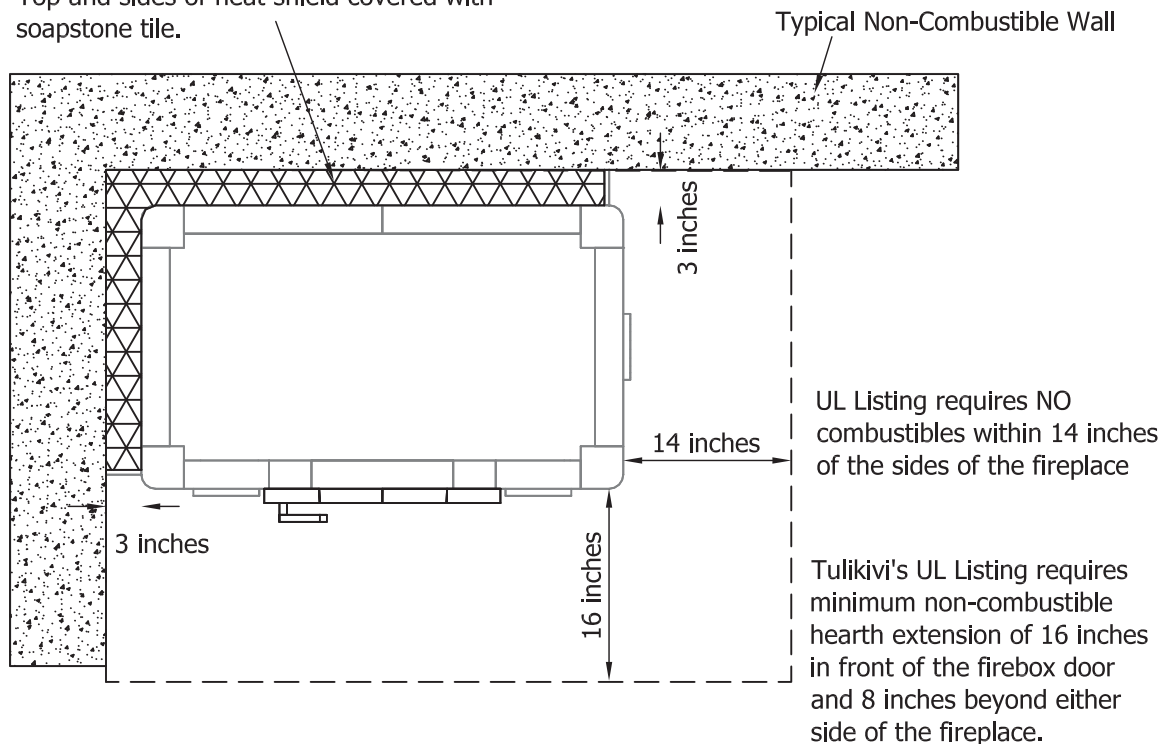

Non-Combustible Wall Clearances

NO Heat Shield

