


Framing Dimensions

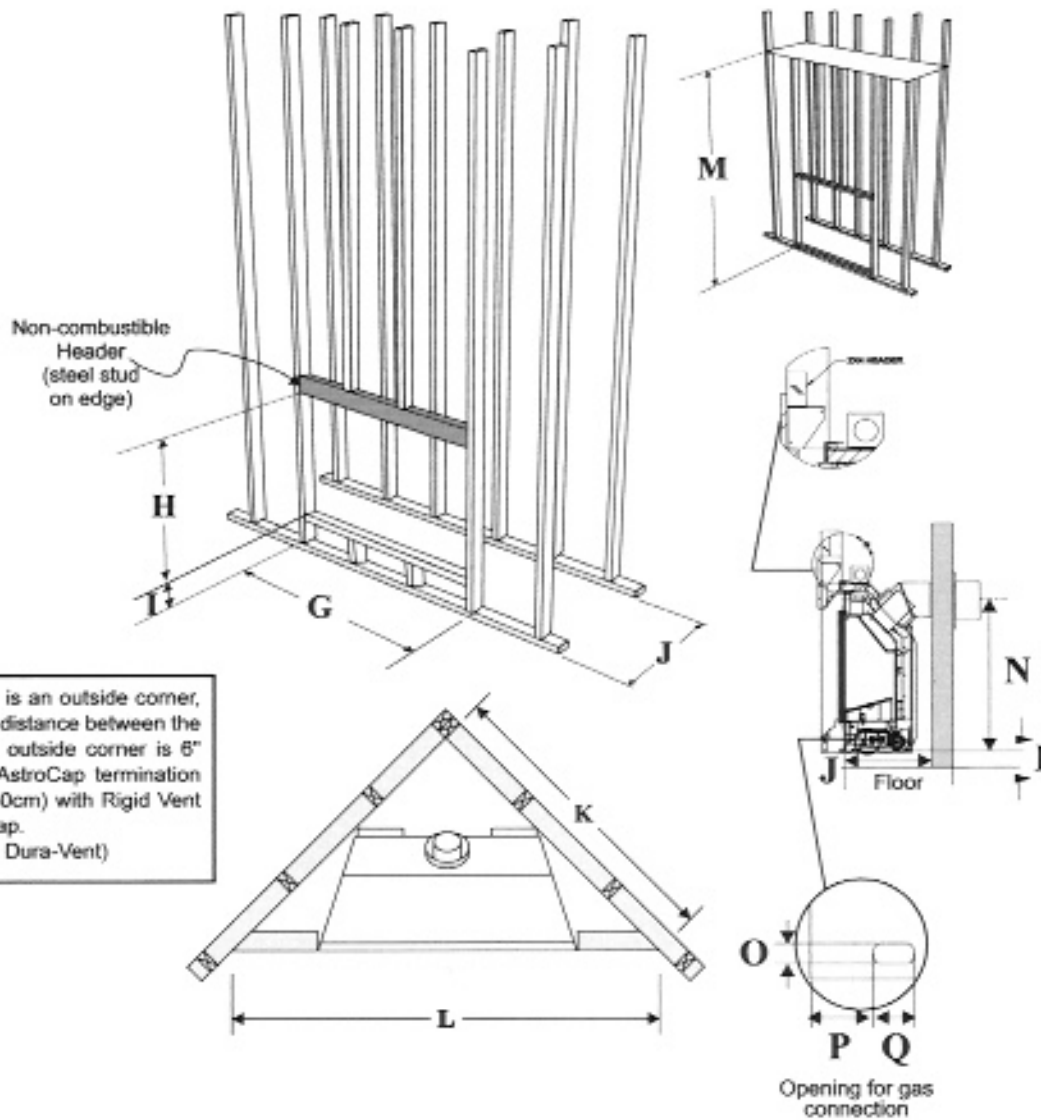

Framing Dimensions	Description	P33CE		P33CE	
		With Non-Combustible Board Only (i.e. Painted Finish)		With Tile, Stone, Brick, Slate, Modera Mantel, Verona Surround or other Non-Combustible finish	
G	Framing Width	35" (889mm)		35" (889mm)	
H	Framing Height *	31-3/4" (806mm)		31-3/4" (806mm)	
I	Framing Rise from Floor	0" (when not using a surround)		0" 3-5/16" min (w/ Verona Surround)	
J	Framing Depth	23-1/4" (591mm) Vertical Rise 20-1/4" (514mm) Rigid / 16-1/2" (406mm) Flex		22-3/4" (578mm) Vertical Rise 19-3/4" (502mm) Rigid / 16" (406mm) Flex	
K	Corner Wall Length	39-1/4" (996mm)		38-15/16" (989mm)	
L	Corner Facing Wall Width	55-1/2" (1410mm)		54-1/2" (1384mm)	
M	Framed Chase Ceiling*	36" (914mm) Rigid	32" (812mm) Flex	36" (914mm) Rigid	32" (812mm) Flex
N	Vent Centerline Height*	30" (762mm) Rigid		30" (762mm) Rigid	
		26" (660mm) Flex		26" (660mm) Flex	
O	Gas Connection Height*	1 1/2" (38mm)		1 1/2" (38mm)	
P	Gas Connection Inset*	7-3/16" (183mm)		7-3/16" (183mm)	
Q	Gas Connection Width*	3" (76mm)		3" (76mm)	

* Measured from base of unit